




Anwendung/Application :




Operating System (OS):

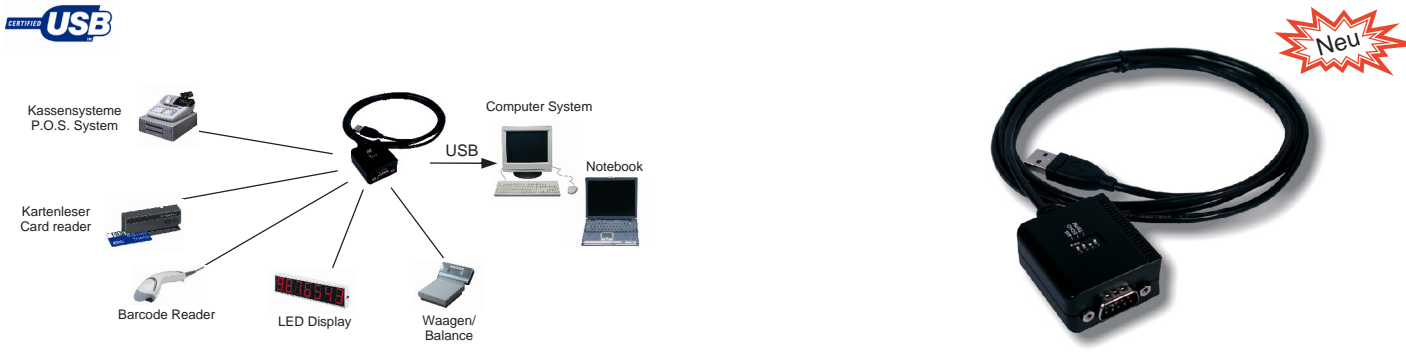



Geprüft/Approved:



Verpackung/Packing:



 USB zu 1S Seriell RS-422/485 Port (FTDI Chip-Set)	
Beschreibung :	<ul style="list-style-type: none"> Das EX-1303 USB 1.1 zu Seriell RS-422/485 Kabel, stellt einen Seriellen RS-422/485 High Performance UART 16C550 Ausgang zur Verfügung. Es ist entwickelt worden um einen weiteren Seriellen RS-422/485 Ausgang in einem kompakten Gehäuse für PC, kleine Workstation oder Server über den USB 1.1 oder 2.0 Bus zu erweitern. Durch die einfache Installation, muss der Rechner nicht geöffnet werden und der Artikel EX-1303 kann bei laufendem Betrieb installiert werden.
Merkmale :	<ul style="list-style-type: none"> Schnittstelle: RS-422/485 FIFO Buffer: 16C550 mit 16Byte I/O Adressen: wird vom Betriebs System vergeben Interrupt: wird vom System BIOS vergeben mit Interrupt Sharing Daten Bits: 7, 8 Stop Bits: 1, 1.5, 2 Parity: none, even, odd Signale: Zwei Einstellungen sind möglich <ul style="list-style-type: none"> 4-Draht RS-422 (TXD+/-, RXD+/-) 2-Draht RS-485 (Data+/-, Data +/-) Stromversorgung: vom USB Bus (Bus Power)
Chip-Set :	<ul style="list-style-type: none"> FTDI
Datentransfer-Rate :	<ul style="list-style-type: none"> 300 Baud bis 921.6Kbaud
Anschlüsse :	<ul style="list-style-type: none"> 1 x USB A-Stecker 1 x 9 Pin Seriell Stecker
Arbeitstemperatur :	<ul style="list-style-type: none"> 0 bis 55°C
Luftfeuchtigkeit :	<ul style="list-style-type: none"> 5 bis 95%
Hardwaresysteme :	<ul style="list-style-type: none"> USB 1.1 oder 2.0
Abmessung / Gewicht :	<ul style="list-style-type: none"> 44.9 x 41.8 x 22 mm / 200g / Kabellänge 1.8 Meter
Lieferumfang :	<ul style="list-style-type: none"> EX-1303, Treiber CD, Handbuch

 USB to 1S Serial RS-422/485 port (FTDI Chip-Set)	
Description:	<ul style="list-style-type: none"> The EX-1303 USB 1.1 to Serial RS-422/485 cable provides one high performance 16C550-type UART compatible RS-422/485 serial port. It is designed for PC, thin client or server to provide instant COM port expansion with a cable through the USB 1.1 or 2.0 Bus. With the easy installation you don't need to open the computer system and install the EX-1303 when the system run.
Feature :	<ul style="list-style-type: none"> Interface: RS-422/485 FIFO Buffer: 16C550 with 16Byte I/O addresses: Setting from the operating system Interrupt: Setting from the System BIOS with Interrupt Sharing Data Bits: 7, 8 Stop Bits: 1, 1.5, 2 Parity: None, even, odd Signal: Two modes are selectable: <ul style="list-style-type: none"> 4-Wire RS-422 (TXD+/-, RxD+/-). 2-Wire RS-485 (Data+/-, Data +/-) Power from the USB Bus (Bus Power)
Chip-Set :	<ul style="list-style-type: none"> FTDI
Data transfer rate :	<ul style="list-style-type: none"> 300 Baud up to 921.6Kbaud
Connectors :	<ul style="list-style-type: none"> 1 x USB A-male connector 1 x 9 pin serial connector
Operating Temperature :	<ul style="list-style-type: none"> 0 up to 55°C
Operating Humidity :	<ul style="list-style-type: none"> 5 up to 95%
Hardware system :	<ul style="list-style-type: none"> USB 1.1 or 2.0
Size / Weight :	<ul style="list-style-type: none"> 44.9 x 41.8 x 22 mm / 200g / Cable length 1.8 meter
Packaging contents :	<ul style="list-style-type: none"> EX-1303, Driver CD, Manual